This Page Is Inserted by IFW Operations and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents will not correct images, please do not report the images to the Image Problem Mailbox.

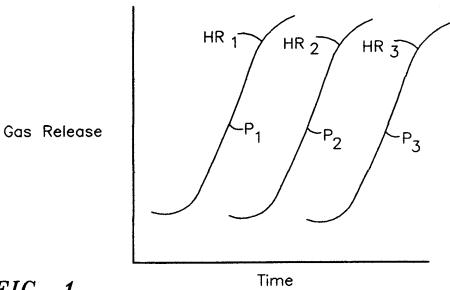


FIG. 1

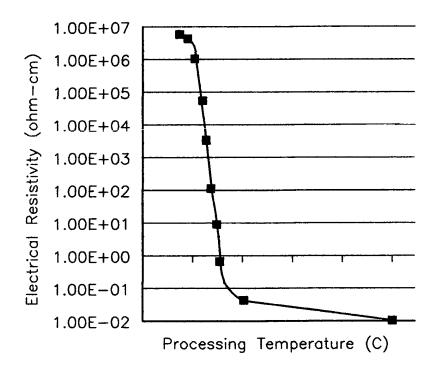
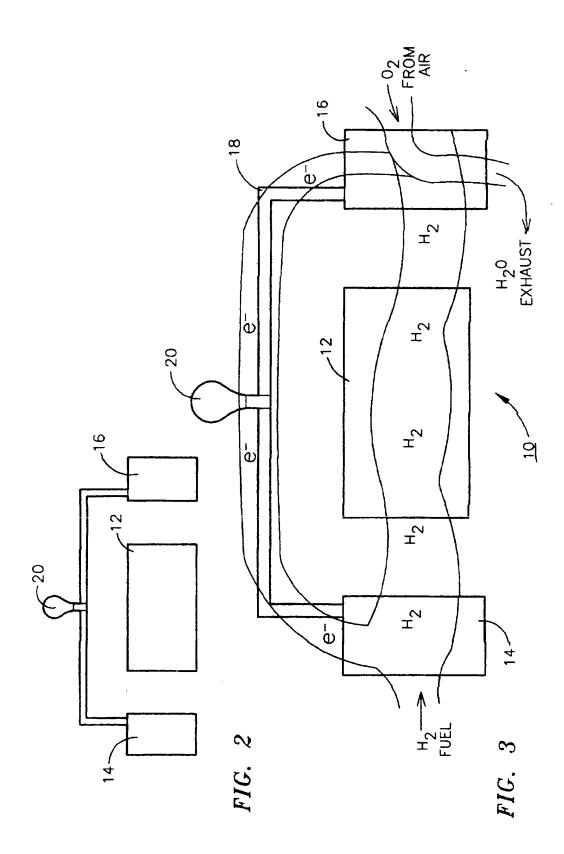


FIG. 8



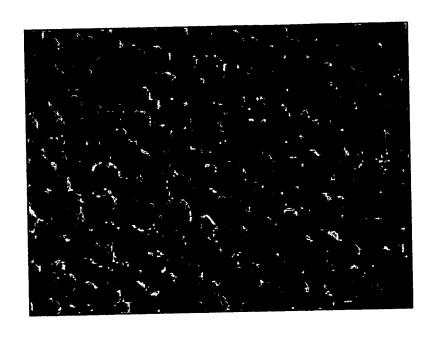


FIG. 4



FIG. 5

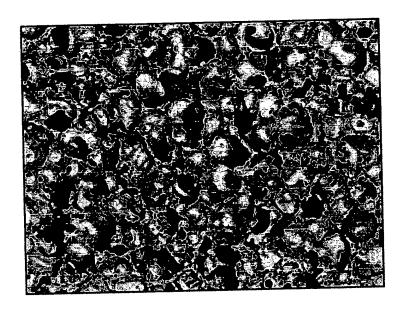


FIG. 6


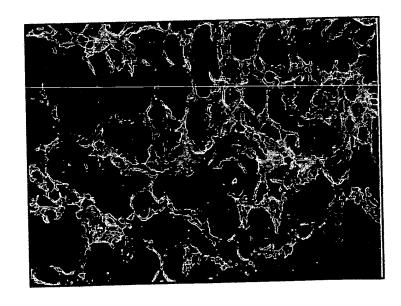


FIG. 7

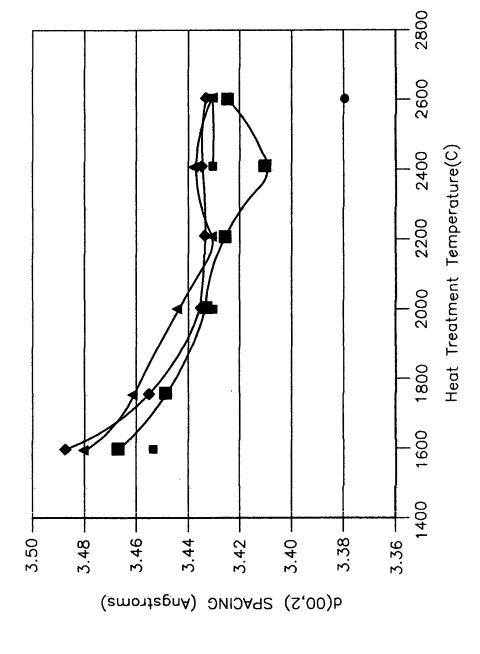

POW

729

M

610


800

FIG. 9

2800 2600 2000 2200 2400 Heat Treatment Temperature(C) 1800 1600 1400 100 200 50 — 150 — 300 — 350 250 0

STACK HEIGHT, Lc (Angstroms)

FIG. 10





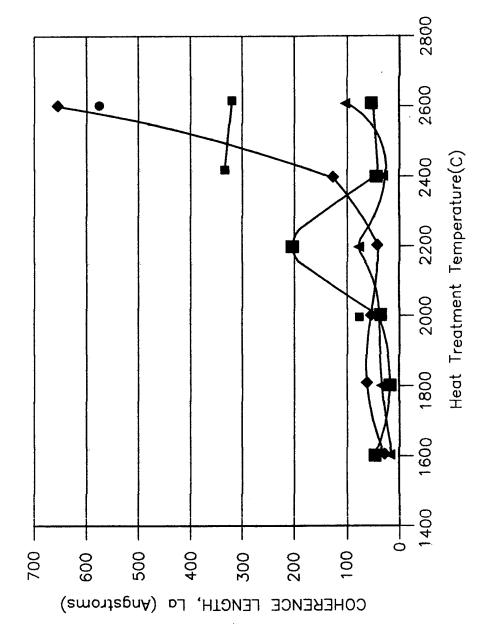



FIG. 11

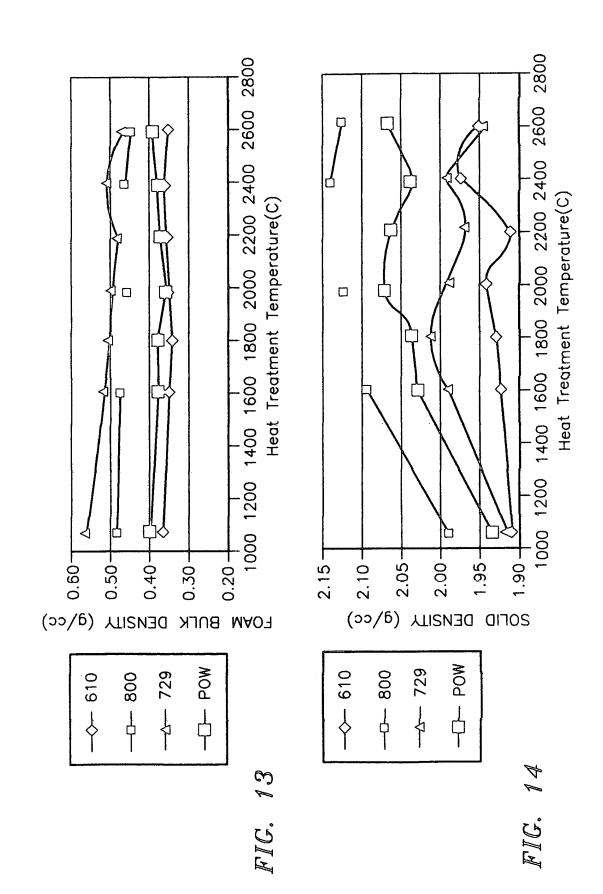

1800 2000 2200 2400 Heat Treatment Temperature(C) ω 1 LA/LC Ratio

FIG. 12



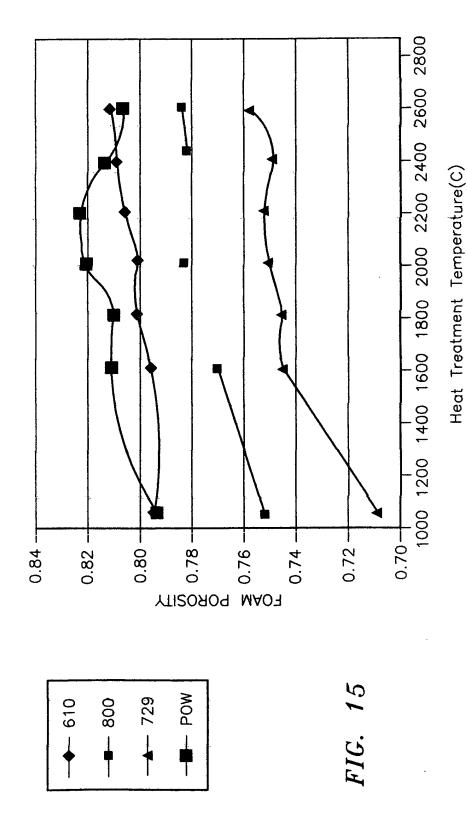

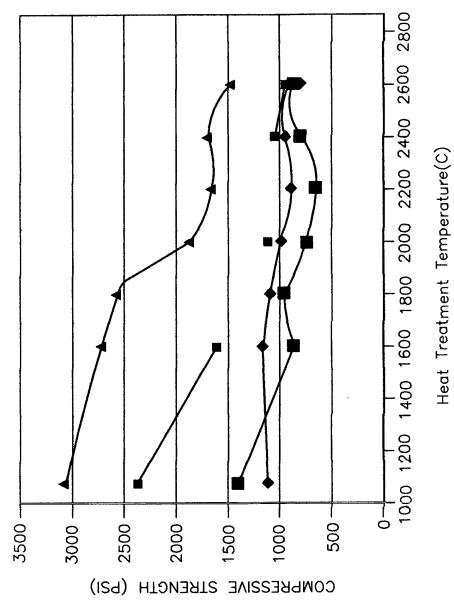


FIG. 16

HOW -

729

♦ 610

--- 800

FIG. 17

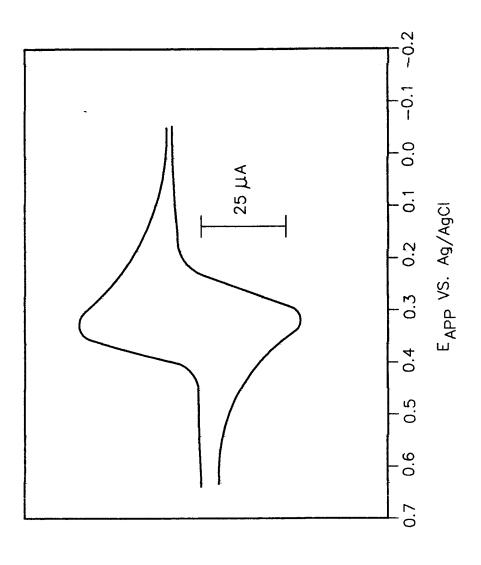
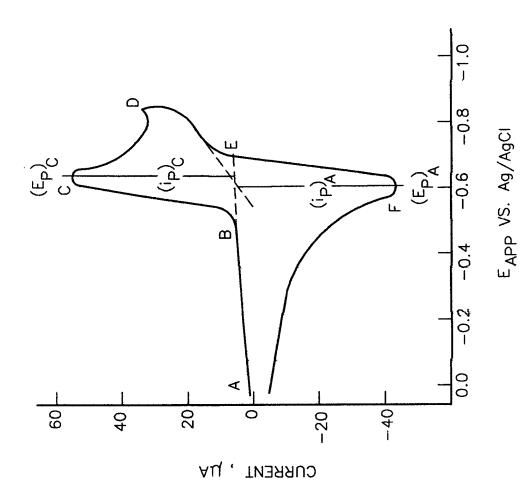
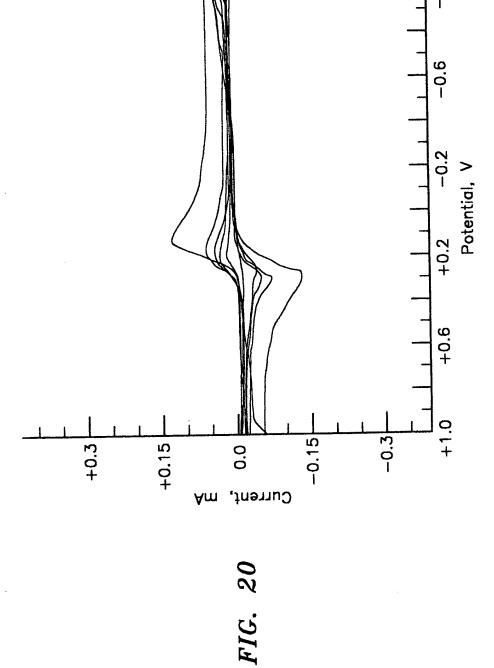

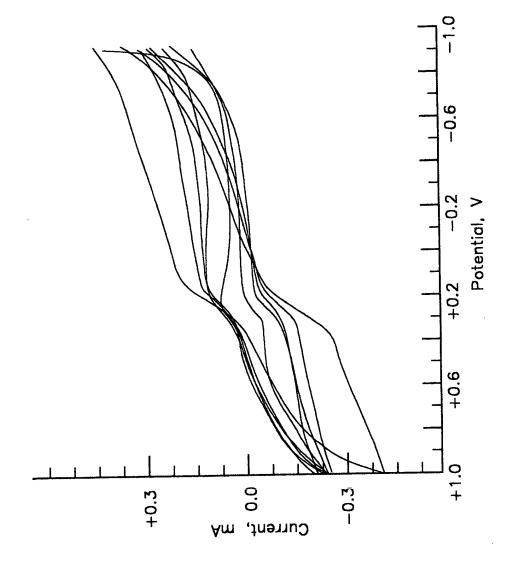



FIG. 18












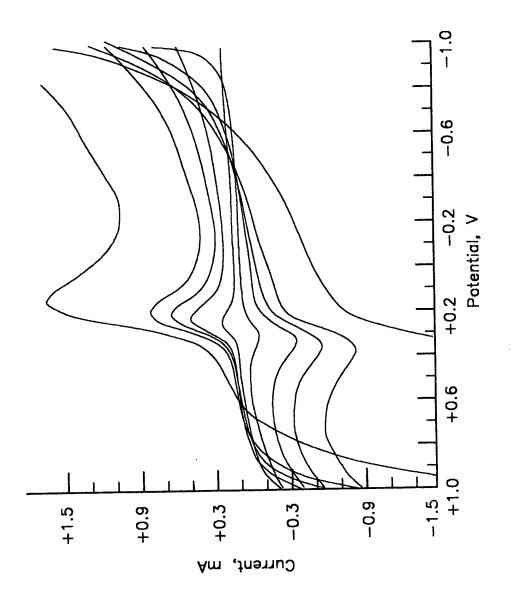

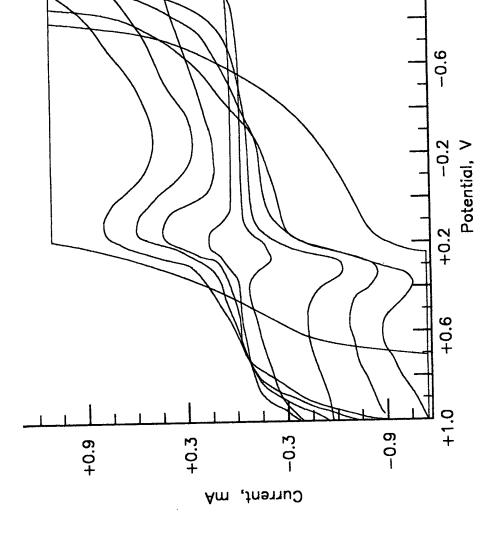
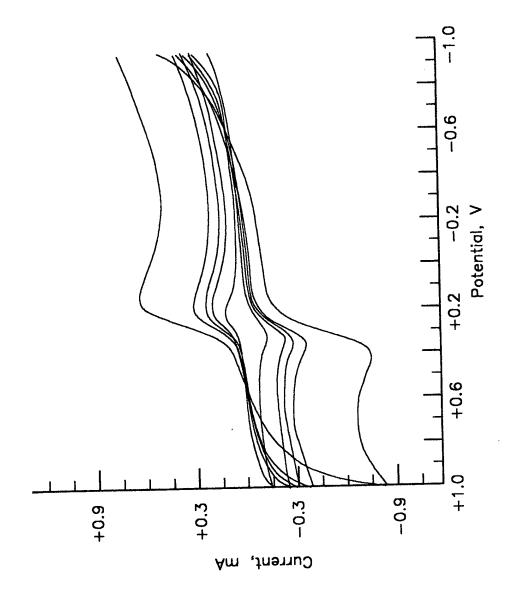


FIG. 23

FIG. 24



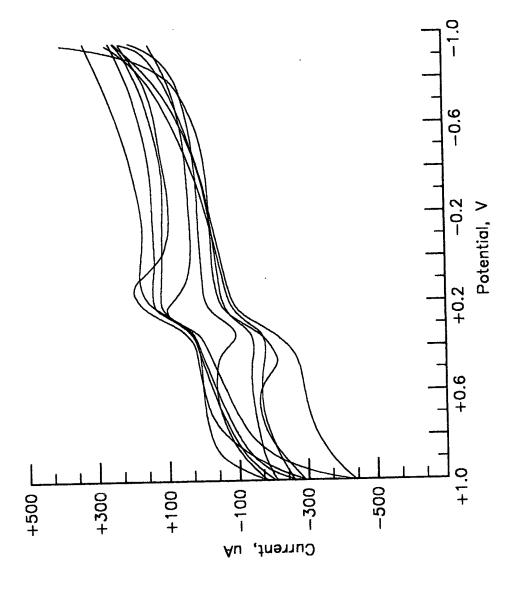


FIG. 25

